



R6

R6 - Modbus TCP

Modbus TCP

R6 - Modbus TCP

R6 - Modbus TCP



| V3.0 | | |
|------|--|------------------------|
| V2.0 | | IO IO M EUIO M EU x |
| V1.0 | | |
| | | |
| | | |



x

IO

x

x

IO



1



1.1

1

2

3

1.2

:

1)

2)

3)


4)

5)

6)

1.3

1.4

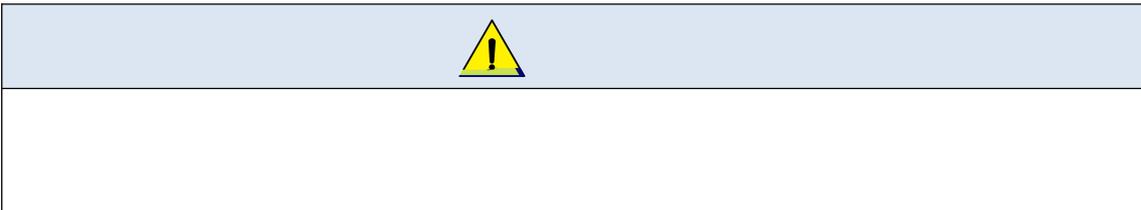



1.5



2

modbusTCP

modbus

bit

bit

bit

APU

bit

bit

bit

bit

3

3.1

0x03

3.1.1

x

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 00 00 |
| | | 2 | 00 01 |

x

| | | | |
|------|---|---|----|
| | | | |
| MBAP | H | 1 | 00 |



Lo



| | | | |
|--------|----|----|--|
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 2c |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 2a |
| | | 2a | 0x41 0x4d 0x38 0x2d 0x51 0x43 0x2d 0x52 0x58 0x45 0x2d 0x37 0x2e 0x38 0x2e 0x30 0x32 0x2d 0x62 0x61 0x74 0x65 0x37 0x5f 0x46 0x41 0x4b 0x45 0x5f 0x54 0x47 0x46 0x5f 0x45 0x4e 0x43 0x4f 0x44 0x45 0x52 0x00 |

3.1.3

ID

ID

xFF

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 00 82 |
| | | 2 | 00 01 |

x x x x x x

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|




| | | | |
|--------|----|---|----------|
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 05 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 02 |
| | | 2 | 0x000x02 |



| | | | |
|--|--|---|-----------------------------------|
| | | 1 | 08 |
| | | 8 | 00000000 0 ID 00000001 1 ID |

3.1.4



| MBAP | H | 1 | 00 |
|--------|----|---|----------|
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 0b |
| | | 1 | 01 |
| MODBUS | | 1 | 10 |
| | | 2 | 08 83 |
| | | 2 | 00 02 |
| | | 1 | 04 |
| | | 4 | 00000001 |



| | | | | |
|--------|----|---|--|-------|
| | | | | |
| MBAP | H | 1 | | 00 |
| | Lo | 1 | | 00 |
| | | 2 | | 00 00 |
| | | 2 | | 00 05 |
| | | 1 | | 01 |
| MODBUS | | 1 | | 03 |
| | | 1 | | 02 |
| | | 2 | | 00 01 |

IO

x b x IO IO

x d IO x b

b

| | | | | |
|--------|----|---|--|-------|
| MBAP | H | 1 | | 00 |
| | Lo | 1 | | 00 |
| | | 2 | | 00 00 |
| | | 2 | | 00 06 |
| | | 1 | | 01 |
| MODBUS | | | | |



| | | | |
|--------|--|---|----------------|
| | | 2 | 00 07 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 04 |
| | | 4 | 00 00 00 00 00 |

IO

x b

x bc

IO

IO

b

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 08 b3 |
| | | 2 | 00 02 |

IO

IO

| | | | |
|--------|----|---|----------------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 07 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 04 |
| | | 4 | 00 00 00 00 00 |

3.1.7

X db

Modbus

V3

3 550 0° H e CU p D ..0 50€





| | | | |
|--------|----|---|-------|
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 08 dc |
| | | 2 | 00 02 |

dc

de

| | | | |
|--------|----|---|-------------|
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 07 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 04 |
| | | 4 | 00 00 00 00 |

3.1.9

mm

mm

X, Y, Z, U, V, W, M, M

x c x b ,

x c

x x e Y

,

c

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|



| | | | |
|--------|----|---|-------|
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 09 1c |
| | | 2 | 00 02 |

2 00 00 00 00 00 06 01 03 09 1c 00 04

e

| | | | |
|--------|----|---|-------------|
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 07 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 04 |
| | | 4 | 00 00 00 00 |

3.1.10

0



x

| MBAP | H | 1 | 00 |
|--------|----|---|-------|
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 05 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 02 |
| | | 4 | 03 25 |

3.1.11

ms

0

D

VBB

3

X d

d

| MBAP | H | 1 | 00 |
|--------|----|---|-------|
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 09 5d |
| | | 2 | 00 04 |



| | | | |
|--------|--|---|-------------------------|
| MODBUS | | 1 | 03 |
| | | 1 | 08 |
| | | 8 | 00 00 00 00 00 00 00 00 |

x

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 09 61 |
| | | 2 | 00 04 |

b

| | | | |
|--------|----|---|-------------------------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 0b |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 08 |
| | | 8 | 00 00 00 00 00 00 00 00 |

3.1.12

x

,

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|



| | | | |
|--------|----|---|-------|
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 09 65 |
| | | 2 | 00 01 |

x

| | | | |
|--------|----|---|-------|
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 05 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 02 |
| | | 2 | 00 01 |

3.1.13

X x d

| | | | |
|--------|----|---|-------|
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 09 66 |
| | | 2 | 00 01 |



| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 05 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 02 |
| | | 2 | 00 00 |

3.1.14

RPM

x x d

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 09 86 |
| | | 2 | 00 01 |

| | | | |
|------|----|---|----|
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 |



| | | | |
|--------|--|---|-------|
| MODBUS | | 1 | 03 |
| | | 1 | 02 |
| | | 2 | 00 00 |

3.1.15

X a

a

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 2 | 09 a6 |
| | | 2 | 00 01 |

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 05 |
| | | 1 | 01 |
| MODBUS | | 1 | 03 |
| | | 1 | 02 |
| | | 2 | 00 01 |

3.2

0x06

3.2.1

xFFF



e

e

, ;

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 06 |
| | | 2 | 4e 20 |
| | | 2 | 00 01 |

3.2.2

x

x ee

ee

x

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 06 |
| | | 2 | 4e e8 |
| | | 2 | 00 64 |



3.3 0x10

3.3.1 IO

IO IO

IO

x

X b x bc , IO x b

x b x b

IO

B b

IO

| | | | |
|--------|----|---|-------------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 0b |
| | | 1 | 01 |
| MODBUS | | 1 | 10 |
| | | 2 | 08 b3 |
| | | 2 | 00 02 |
| | | 1 | 04 |
| | | 4 | 00 00 00 01 |

IO

b

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 10 |
| | | 2 | 08 b3 |
| | | 2 | 00 02 |



3.3.3

IO

IO

IO

IO

M

EUIO

x

x e

d

e

| | | | |
|--------|----|---|-------------------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 0d |
| | | 1 | 01 |
| MODBUS | | 1 | 10 |
| | | 2 | 4e 58 |
| | | 2 | 00 03 |
| | | 1 | 06 |
| | | 6 | 00 00 00 01 00 01 |

e

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 10 |
| | | 2 | 4e 58 |
| | | 2 | 00 03 |



3.3.4

bit

x

x f c

x d

b f c

| MBAP | H | 1 | 00 |
|--------|----|---|-------------|
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 0b |
| | | 1 | 01 |
| MODBUS | | 1 | 10 |
| | | 2 | 4f 4c |
| | | 2 | 00 02 |
| | | 1 | 04 |
| | | 4 | 00 00 00 64 |

f c

| MBAP | H | 1 | 00 |
|--------|----|---|-------|
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 10 |
| | | 2 | 4f 4c |
| | | 2 | 00 02 |

b f e

f f c

C



3.3.5

ID ID ID

x x

b

ID

, ,

| | | | |
|--------|----|---|-------------------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 0d |
| | | 1 | 01 |
| MODBUS | | 1 | 10 |
| | | 2 | 75 32 |
| | | 2 | 00 03 |
| | | 1 | 06 |
| | | 6 | 00 64 00 06 00 23 |

f c

| | | | |
|--------|----|---|-------|
| | | | |
| MBAP | H | 1 | 00 |
| | Lo | 1 | 00 |
| | | 2 | 00 00 |
| | | 2 | 00 06 |
| | | 1 | 01 |
| MODBUS | | 1 | 10 |
| | | 2 | 75 32 |
| | | 2 | 00 03 |

x x C

b

A



A B C

| | | | A | B | C |
|--------|----|----|-------------------------|---|---|
| MBAP | Hi | 1 | 00 | | |
| | Lo | 1 | 00 | | |
| | | 2 | 00 00 | | |
| | | 2 | 00 0d | | |
| | | 1 | 01 | | |
| MODBUS | | 1 | 10 | | |
| | | 2 | 75 35 | | |
| | | 2 | 00 1A | | |
| | | 1 | 34 | | |
| | | 52 | 00 02 00 01 00 00 00 01 | | |
| | | | 00 00 00 02 00 00 00 03 | | |
| | | | 00 00 00 04 00 00 00 05 | | |
| | | | 00 00 00 06 00 00 00 07 | | |
| | | | 00 00 00 08 00 00 | | |



ID 32

| | | | | | | |
|-------|-------|-------|-----|---|---|---|
| 132 | 84 | 0 | ID | R | / | / |
| 133 | 85 | 1 | ID | R | / | / |
| 134 | 86 | 1 | ID | R | / | / |
| | | | | R | / | / |
| 2178 | 882 | 1023 | I 4 | | | |



| | | | | | | | |
|------|-------|-------|------------|-----|---|---|--|
| | | | | | | | |
| M 0 | 2198 | 896 | M 0 0 15 | R | / | / | |
| M 1 | 2199 | 897 | M 1 16 31 | R | / | / | |
| M 1 | 2200 | 898 | M 1 0 15 | R | / | / | |
| M 2 | 2201 | 899 | M 2 16 31 | R | / | / | |
| M 2 | 2202 | 89A | M 2 0 15 | R | / | / | |
| EU 0 | 2203 | 89B | EU 0 16 31 | R | / | / | |
| EU 0 | 2204 | 89C | EU 0 0 15 | R | / | / | |
| | | | | R | / | / | |
| | 2226 | 8B2 | | R | / | / | |
| IO 0 | 2227 | 8B3 | IO 0 16 31 | R/W | / | / | |
| IO 0 | 2228 | 8B4 | IO 0 0 15 | R/W | / | / | |
| IO 1 | 2229 | 8B5 | IO 1 16 31 | R/W | / | / | |
| IO 1 | 2230 | 8B6 | IO 1 0 15 | R/W | / | / | |
| IO 2 | 2231 | 8B7 | IO 2 16 31 | R/W | / | / | |
| IO 2 | 2232 | 8B8 | IO 2 0 15 | R/W | / | / | |
| IO 3 | 2233 | 8B9 | IO 3 16 31 | R/W | / | / | |
| IO 3 | 2234 | 8BA | IO 3 0 15 | R/W | / | / | |
| IO 4 | 2235 | 8BB | IO 4 16 31 | R/W | / | / | |
| IO 4 | 2236 | 8BC | IO 4 0 15 | R/W | / | / | |
| M 0 | 2237 | 8BD | M 0 16 31 | R/W | / | / | |
| M 0 | 2238 | 8BE | M 0 0 15 | R/W | / | / | |
| M 1 | 2239 | 8BD | M 1 16 31 | R/W | / | / | |



| | | | | | | |
|------|-------|-------|------|-------|---------|---------------------|
| M 1 | 2240 | 8BE | M 1 | 0 15 | R/W / / | |
| M 2 | 2241 | 8BF | M 2 | 16 31 | R/W / / | |
| M 2 | 2242 | 8C0 | M 2 | 0 15 | R/W / / | |
| EU 0 | 2243 | 8C1 | EU 0 | 16 31 | R/W / / | |
| EU 0 | 2244 | 8C2 | EU 0 | 0 15 | R/W / / | |
| | | | | | R/W / / | |
| | 2266 | 8DA | | | R/W / / | |
| 2 | 2267 | 8DB | | | R 0 8 | 8 |
| 1 | 2268 | 8DC | 0 J1 | | R / / | double 3 1000 |
| 1 | 2269 | 8DD | 0 J1 | | R / / | |
| 2 | 2270 | 8DE | 1 J2 | | R / / | |
| 2 | 2271 | 8DF | 1 J2 | | R / / | |
| 3 | 2272 | 8E0 | 2 J3 | | R / / | |
| 3 | 2273 | 8E1 | 2 J3 | | R / / | |
| 4 | 2274 | 8E2 | 3 J4 | | R / / | |
| 4 | 2275 | 8E3 | 3 J4 | | R / / | 8 |
| 5 | 2276 | | | | | |

36

1



| | | | | | | | | |
|---|-------|-------|-----------|---|---|---|----|--|
| | | | | | | | | |
| X | 2333 | 91D | 0(X) | R | / | / | | |
| Y | 2334 | 91E | 1(Y) | R | / | / | | |
| Y | 2335 | 91F | 1(Y) | R | / | / | | |
| Z | 2336 | 920 | 2(Z) | R | / | / | | |
| Z | 2337 | 921 | 2(Z) | R | / | / | | |
| U | 2338 | 922 | 3(U) | R | / | / | | |
| U | 2339 | 923 | 3(U) | R | / | / | | |
| V | 2340 | 924 | 4(V) | R | / | / | | |
| V | 2341 | 925 | 4(V) | R | / | / | | |
| W | 2342 | 926 | 5(W) | R | / | / | | |
| W | 2343 | 927 | 5(W) | R | / | / | | |
| M | 2344 | 928 | 6(M) | R | / | / | | |
| M | 2345 | 929 | 6(M) | R | / | / | | |
| M | 2346 | 92A | 7(M) | R | / | / | | |
| M | 2347 | 92B | 7(M) | R | / | / | | |
| | | | | R | / | / | | |
| | 2395 | 95B | | R | / | / | | |
| | 2396 | 95C | | R | / | / | | |
| | 2397 | 95D | 48 63bi t | R | / | / | 64 | |
| | 2398 | 95E | 32 47bi t | R | / | / | | |
| | 2399 | 95F | 16 31bi t | R | / | / | | |
| | 2400 | 960 | 0 15bi t | R | / | / | | |
| | 2401 | 961 | 48 63bi t | R | / | / | | |
| | 2402 | 962 | 32 47bi t | R | / | / | | |




| | | | | | | | |
|---|-------|-------|----------|---|---|----|--------|
| | 2403 | 963 | 16 31bit | R | / | / | |
| | 2404 | 964 | 0 15bit | R | / | / | |
| | 2405 | 965 | ID | R | / | / | |
| 1 | 2406 | 966 | 0 | R | / | / | |
| 2 | 2407 | 967 | 1 | R | / | / | |
| 3 | 2408 | 968 | 2 | R | / | / | |
| 4 | 2409 | 969 | 3 | R | / | / | |
| 5 | 2410 | 96A | 4 | R | / | / | |
| 6 | 2411 | 96B | 5 | R | / | / | |
| 7 | 2412 | 96C | 6 | R | / | / | |
| 8 | 2413 | 96D | 7 | R | / | / | |
| | | | | R | / | / | |
| | 2437 | 985 | | R | / | / | |
| 1 | 2438 | 986 | 0 | R | / | / | |
| 2 | 2439 | 987 | 1 | R | / | / | |
| 3 | 2440 | 988 | 2 | R | / | / | |
| 4 | 2441 | 989 | 3 | R | / | / | |
| 5 | 2442 | 98A | 4 | R | / | / | |
| 6 | 2443 | 98B | 5 | R | / | / | |
| 7 | 2444 | 98C | 6 | R | / | / | |
| 8 | 2445 | 98D | 7 | R | / | / | |
| | | | | R | / | / | |
| | 2469 | 9A5 | | R | / | / | |
| | 2470 | 9A6 | | R | 0 | 1 | 1 , 0 |
| | 2471 | 9A7 | | R | 0 | 1 | 1 0 |
| | 2472 | 9A8 | | R | 1 | 64 | |
| | 2473 | 9A9 | | R | / | / | |
| | | | | R | / | / | |
| | 2536 | 9E8 | | R | / | / | |
| | 2537 | 9E9 | | R | / | / | |
| | | | | R | / | / | |
| | | | | R | / | / | |
| | 20000 | 4E20 | | W | / | / | |



| | | | | | | | |
|--|-------|-------|--------------|---|---|----|--|
| | 20001 | 4E21 | | W | / | / | |
| | 20002 | 4E22 | | W | / | / | |
| | 20003 | 4E23 | startButton: | W | / | / | |
| | 20004 | 4E24 | stopButton: | W | / | / | |
| | 20005 | 4E25 | | W | / | / | |
| | 20006 | 4E26 | | W | / | / | : |
| | | | | W | / | / | |
| | 20049 | 4E51 | | W | / | / | |
| | 20050 | 4E52 | ID | W | / | / | ID |
| | 20051 | 4E53 | ID | W | / | / | |
| | 20052 | 4E54 | | W | / | / | |
| | 20053 | 4E55 | | W | / | / | |
| | 20054 | 4E56 | | W | / | / | |
| | 20055 | 4E57 | | W | / | / | |
| | 20056 | 4E58 | ID | W | 0 | 7 | 0 4 10 5 7 M () 8 EUI O |
| | 20057 | 4E59 | | W | 0 | 31 | 0 31 |
| | 20058 | 4E5A | | W | 0 | 1 | 0 OFF 1 CN |
| | 20059 | 4E5B | ID | W | / | / | |



| | | | | | | | | | |
|-------|-------|---------------|--|----|---|------|----|--|---|
| 20060 | 4E5C | X | | W | / | / | | | |
| 20061 | 4E5D | X | | W | / | / | | | |
| 20062 | 4E5E | Y | | W | / | / | | | |
| 20063 | 4E5F | Y | | W | / | / | | | |
| 20064 | 4E60 | Z | | W | / | / | | | |
| 20065 | 4E61 | Z | | W | / | / | | | |
| 20066 | 4E62 | X | | W | / | / | | | |
| 20067 | 4E63 | X | | W | / | / | | | |
| 20068 | 4E64 | Y | | W | / | / | | | |
| 20069 | 4E65 | Y | | W | / | / | | | |
| 20070 | 4E66 | Z | | W | / | / | | | |
| 20071 | 4E67 | Z | | W | / | / | | | |
| | | | | W | / | / | | | |
| 20200 | 4EE8 | | | RW | 0 | 1000 | 32 | | 1 |
| | | | | RW | / | / | | | |
| 20300 | 4F4C | al l par a[0] | | RW | / | / | | | |

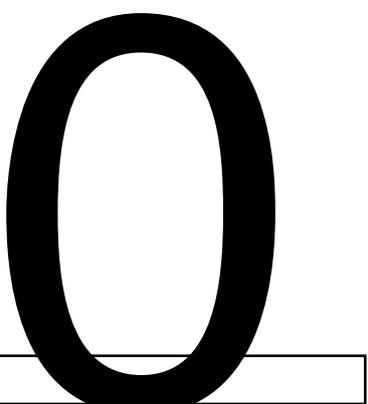



| | | | | | | | |
|--|-------|------|------------|----|---|---|----------------------|
| | | | 4 | | | | |
| | 30004 | 7534 | 0-5 1-6 | RW | / | / | 6 1, 2, 6 0x23 |
| | 30005 | 7535 | | RW | / | / | |
| | 30006 | 7536 | | RW | / | / | 1 |
| | 30007 | 7537 | 1 | W | / | / | |
| | 30008 | 7538 | 1 | W | / | / | |
| | ... | ... | ... | W | / | / | |
| | 40000 | 9C40 | | W | / | / | |

5 0x01 0x05

| | (10) | 16 | | r/w | | | |
|--------|-------|-----|------------------|-----|---|---|--|
| Y010 | 0 | 0 | 0xFF00 0x0000 | W | / | / | |
| Y247 | 159 | 9F | 0xFF00 0x0000 | W | / | / | |
| M010 | 160 | A0 | 0xFF00 0x0000 | W | / | / | |
| M47 | 255 | FF | 0xFF00 0x0000 | W | / | / | |
| EUY010 | 256 | 100 | 0xFF00 0x0000 | W | / | / | |
| EUY047 | 287 | 11F | 0xFF00 0x0000 | W | / | / | |



518000

0755- 26417678

0755- 26416578

